


The Turbocor Family of Compressors Model TT500

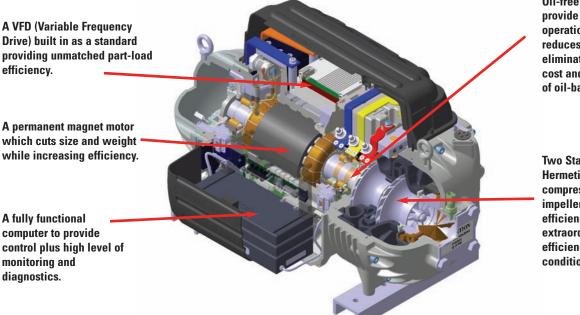

Oil-free magnetic bearings provide quiet and reliable operation. No need for oil, reduces maintenance and eliminates the complexity, cost and reliability issues of oil-based designs.

Two Stage, Direct Drive, Hermetic Centrifugal compressor with shrouded impellers resulting in high efficiency at full load and extraordinarily high efficiency at part load conditions.

A 600 to 700 kW nominal capacity compressor that is:

60%+ More Efficient: A compressor 60%+ more efficient than other compressors in its size range. And this exceptional performance can be monitored, either on site or remotely via a state-of-the-art monitoring diagnostics system.

Totally Oil-Free: Oil-free operation is something the industry has worked decades to achieve. This *oil-free* design eliminates not only the potential for efficiency robbing oil contamination, but also all of the oil management accessories: oil heaters, oil pumps, oil separators, oil filters, etc., plus oil disposal.

Extremely Lightweight: TT500 compressor weighs only 136 kg, approximately 1/10th the weight of conventional compressors. Further, this compressor only requires about half the space of a traditional compressor.


Very Quiet: At an operating sound level; the compressor is so quiet that, given typical equipment background noise, one literally cannot hear it run.

Redefines Soft-Start: The TT500 compressor redefines soft-start, drawing less than 2 amps, compared to 900-1000 amps required by conventional compressors using across-the-line starters.

Making a world of difference


Visit our website at www.turbocor.com to learn more about this and other Danfoss Turbocor products.

Unprecedented Energy Efficiency

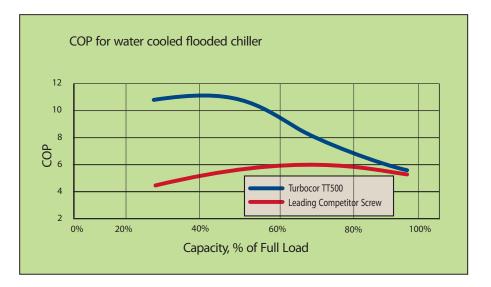

Outstanding energy savings from digitally controlled, frictionless two-stage centrifugal compression means significant reductions in operating cost and environmental emissions associated with energy production.

Chart shows the full and part load performance curve of the Turbocor compressor compared with a typical screw compressor on a 635kWR (180-tonR) water cooled chiller. The integrated part load values (IPLV) yield a 60%+ improvement in many applications.

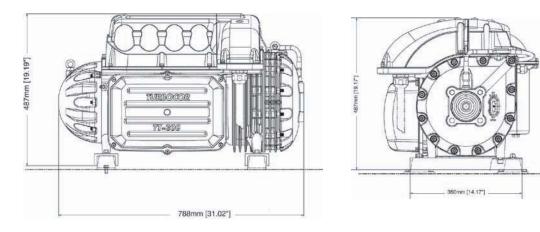

	Length
	Width518 mm (20.40")
E.	Height 487 mm (19.19")
	Compressor weight 136 kg (300 lbs)
	RefrigerantR-134a



1769 E. Paul Dirac Drive Tallahassee, FL 32310, USA Phone: +1 (850)-504-4800 Fax: +1 (850)-575-2126 www.turbocor.com

Danfoss can accept no responsibility for possible errors in catalogues, brochure, and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subequential changes being necessary in specification already agreed. All trademarks in the material are property of the respective companies. Danfoss and the Danfoss logo are trademarks of Danfoss A/S. All rights reserved.